

SEALED WELL ELECTRIC TABLES WITH ENCLOSED BASE



SW-5E-240-BS Shown



Sealed Well with Drain

Item #: _____ Qty #: _____
 Model #: _____
 Project #: _____



Optional TA-255P Casters Available

FEATURES:

- Stainless steel undershelf
- Fiberglass insulation between each compartment
- Drains with gate valves per well
- Stainless steel 8" support shelf with removable 3/8" thick poly cutting board - Ships K.D.

MATERIAL:

- TOP:** 20 gauge #302 stainless steel with die stamped pan openings. (11.875" x 20.062")
- BODY:** 22 gauge #430 stainless steel
- BASE:** 18 gauge stainless steel with fully adjustable stainless steel bullet foot
- UNDERSHELF:** 22 gauge #430 stainless steel
- LINERS:** 20 Gauge stainless steel deep drawn with drain
- CUTTING BOARD:** White Thermoplastic
- CUTTING BOARD BRACKETS:** 16 gauge, #302 stainless steel

ELECTRICAL:

- 120V units yield 640 Watts
- 208V/240V dual voltage units yield 825 Watts at 208V and 1100 Watts at 240V
- 8' electrical cord with plug
- Infinite control knobs
- Indicator lights



Model #	Length	Width*	# of Wells	Volts	Amps	Watts	NEMA Plug	Wt.	Cu. Ft.
SW-2E-120-BS	A = 31-13/16"	30-5/8"	2	120	10.67	1280	5-20P	127 lbs.	28
SW-3E-120-BS	B = 47-1/8"	30-5/8"	3	120	16	1920	5-20P	154 lbs.	41.32
SW-4E-120-BS	C = 62-7/16"	30-5/8"	4	120	21.33	2560	L5-30P	187 lbs.	54.55
SW-2E-240-BS	A = 31-13/16"	30-5/8"	2	208/240	7.94/9.16	1650/2200	6-20P	127 lbs.	28
SW-3E-240-BS	B = 47-1/8"	30-5/8"	3	208/240	11.91/13.74	2475/3300	6-20P	154 lbs.	41.32
SW-4E-240-BS	C = 62-7/16"	30-5/8"	4	208/240	15.88/18.32	3300/4400	L6-30P	187 lbs.	54.55
SW-5E-240-BS	D = 77-3/4"	30-5/8"	5	208/240	19.85/22.90	4125/5500	L6-30P	281 lbs.	66.94
SW-6E-240-BS	E = 93-1/16"	30-5/8"	6	208/240	23.82/27.48	4850/6600	L6-30P	301 lbs.	88

*Width Includes 8" Cutting Board

NOTE: Units are not designed to cook or heat frozen or refrigerated foods. Food placed in tables should already be hot, and the table will maintain the proper temperatures


NEMA PLUGS: Your plug will look like this...




NEMA 5-20P



NEMA 6-20P



NEMA L5-30P




NEMA L6-30P

NOTE: For international applications, plug may need to be replaced (by others) in field.

DIMENSIONS and SPECIFICATIONS

TOL ± .125"

ALL DIMENSIONS ARE TYPICAL

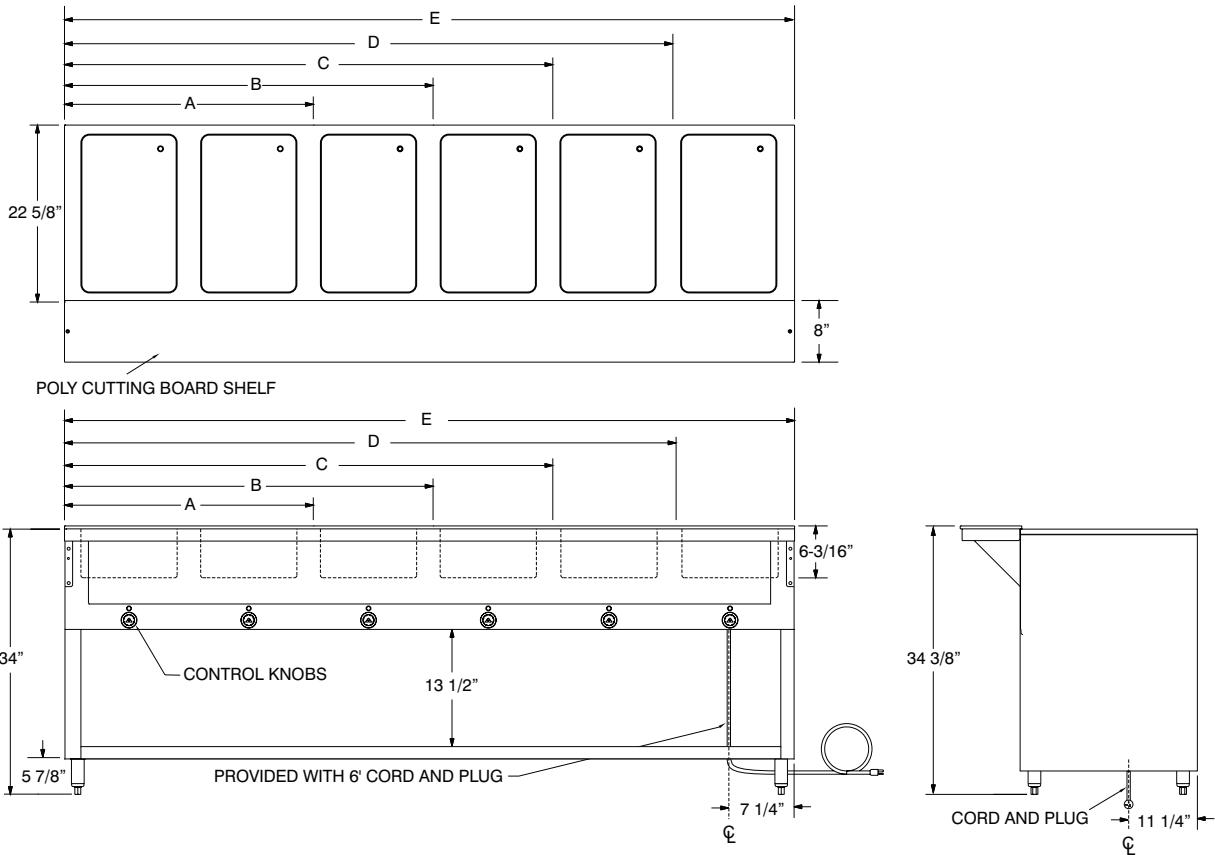

Food Table Shelving, Options & Accessories

Visit our website for additional Food Table Accessories



Model	Length	Approx. Wt.	Cu. Ft.
TBS-2	31-13/16"	34 lbs.	2
TBS-3	47-1/8"	42 lbs.	3
TBS-4	62-7/16"	47 lbs.	4
TBS-5	77-3/4"	55 lbs.	4
TBS-6	93-1/16"	63 lbs.	4

Acrylic Side Panels for Buffet Shelf
Add side panels to meet additional NSF requirements (2 panels per side)
TBP-1 One Side
TBP-2 Two Sides
Field Installation Available



Model	Length	Approx. Wt.	Cu. Ft.
TSS-2	31-13/16"	18 lbs.	2
TSS-3	47-1/8"	23 lbs.	3
TSS-4	62-7/16"	30 lbs.	4
TSS-5	77-3/4"	35 lbs.	4
TSS-6	93-1/16"	41 lbs.	4

Acrylic Side Panel for Serving Shelf
Add side panels to meet additional NSF requirements (1 panel per side)
TSP-1 One Side
TSP-2 Two Sides
Field Installation Available

- SU-25S** Add Casters to Food Units with Undershelf (Includes 4 -5" Swivel Casters, 2 w/ Brakes & Legs That Maintain Height)
- SU-25** Add Casters to Food Units with Undershelf (For Units Built Before Oct. 2015. Includes 4 -5" Swivel Casters, 2 w/ Brakes.)
- SU-90** Automatically fills & maintains water level. For DISW, DISLSW, SW & HDSW Series. Requires Manifold Drain Assembly (Except HDSW series).
- TCB-OMIT** Remove Poly Cutting Board

SU-45A 12" x 1" Adapter Bar
SU-45B 20" x 3" Adapter Bar

Manifold Drain Shown (-M)
-T Thermostatic Control (Per Well)
-M Manifold Drains (Per Well)

